


NIEDERDRUCK Ventilator 2-polig



LOW-PRESSURE fan 2-pole



Volumenstrom / performance of air	max 190 m³/h
Druckdifferenz ΔP_{fa} / pressure ΔP_{fa}	max 230 Pa
Motor-Nennleistung / power out	36 W
Nennspannung / voltage	230 V
Nennstrom / current	0,37 A
Nennzahl / speed	2760 1/min
Frequenz / frequency	50 Hz
Frequenz regelbar bis Nennstrom / adjustable by frequency inverter	Nein / no
Schutzart / protection mode	IP54
Motorschutz / motor protection	Thermokontakt / thermostay relay
Schalldruckpegel freiausblasend in 1 m Abstand gem. DIN 45635	61 dB (A)
/ noise pressure level free-blowing 1 m behind the blower acc. DIN 45635	
Gewicht / weight	ca. 2,8 kg

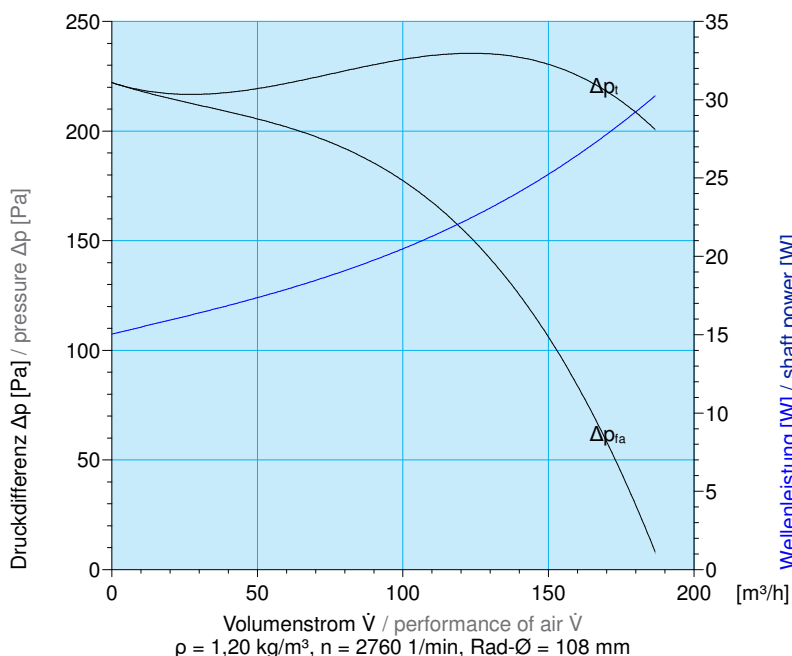

Abmessungen / Measurements

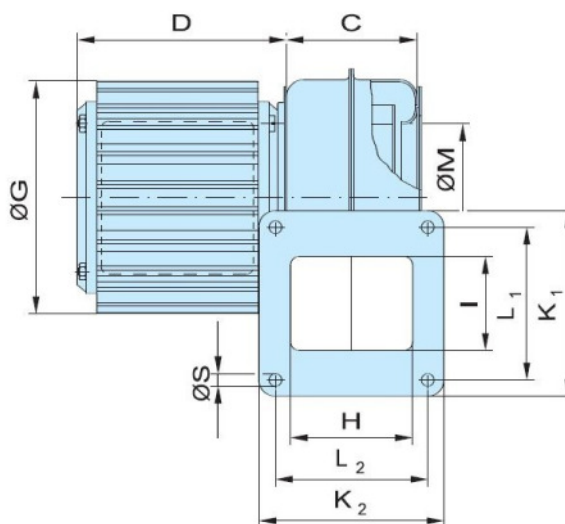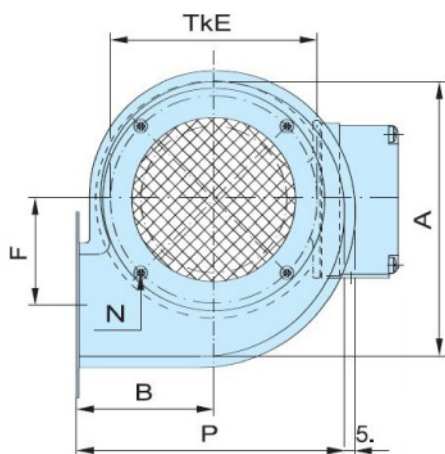

A	144
B	79
C	60
D	90
E	116
F	51
G	108
H	55,5
I	52
K1	85
K2	85
L1	70
L2	70
M	87
N	M3
P	148
S	5,8